

**GBU408LC AND GBU410LC**  
**Low VF Bridge Rectifier**

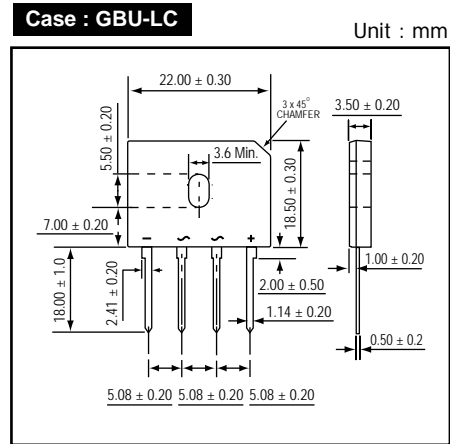
● **FEATURES**

- \* Internal structure with GPRC (glass passivated rectifier chip) inside
- \* Compliance to RoHS product
- \* Low forward voltage drop
- \* Superior thermal conductivity
- \* High current capability with small package
- \* Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- \* This series is UL listed under the recognized component index, file number E335309


● **MECHANICAL DATA**

- Case :** Molded Plastic
- Terminals :** Tin Plated, solderable per MIL-STD-750, Method 2026.
- Polarity :** As marked on Body
- Weight :** 4.0 grams(approx)

● **OUTLINE DIMENSIONS**



● **MARKING**




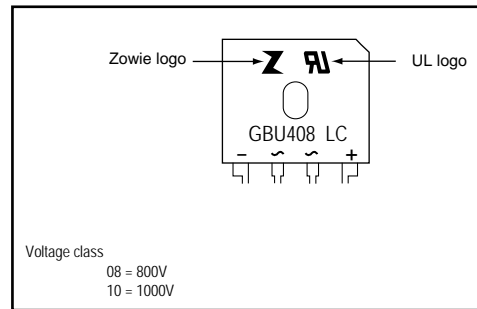


**Absolute Maximum Ratings (Ta = 25 °C)**

ITEM	Symbol	Conditions	Rating		Unit
			GBU408LC	GBU410LC	
Repetitive peak reverse voltage	VRRM		800	1000	V
Average forward current at See fig.1	IF(AV)	TA = 50	4.0		A
Peak forward surge current	IFSM	8.3ms single half sine-wave	135		A
Operating junction and storage temperature Range	Tj,TSTG		-55 to +175		°C

**Electrical characteristics (Ta = 25 °C)**

ITEM	Symbol	Conditions	Min.	Typ.	Max.	Unit
Forward voltage	VF	IF = 2.0A	-	0.87	0.90	V
Repetitive peak reverse current	IRRM	VR = Max. VRRM , Ta = 25 °C	-	-	5	uA
Rating for fusing ( t<8.3ms)	I²t		-	-	75.6	A²sec
Junction capacitance	Cj	VR = 4V, f = 1.0 MHz	-	45	-	pF
Thermal resistance	Rth(JA)	Junction to ambient (Without heatsink)	-	16	-	°C/W
	Rth(JC)	Junction to lead (With heatsink)	-	3.0	-	

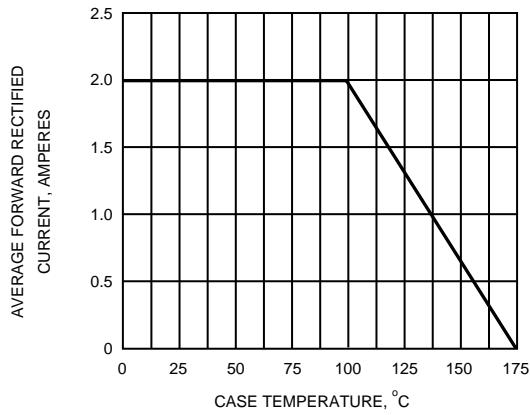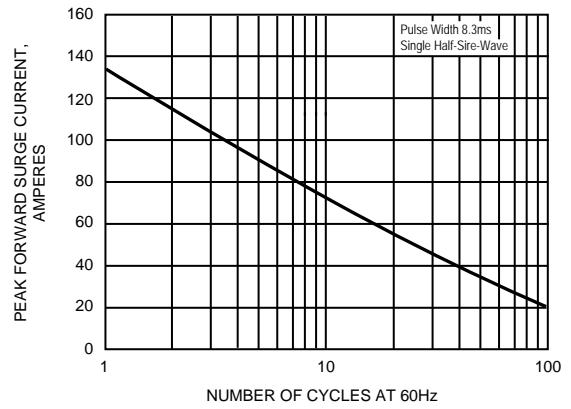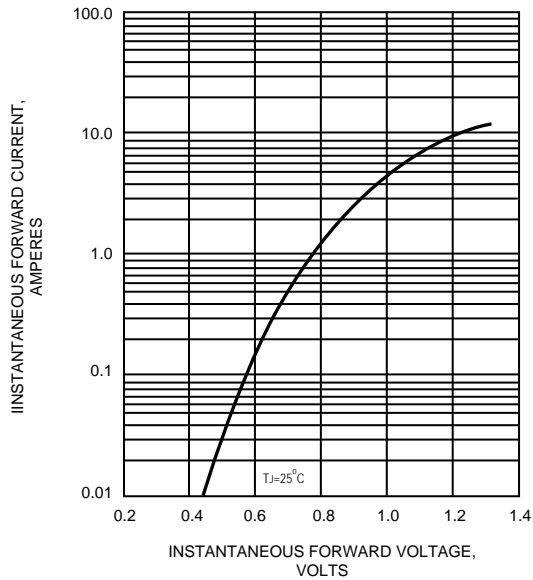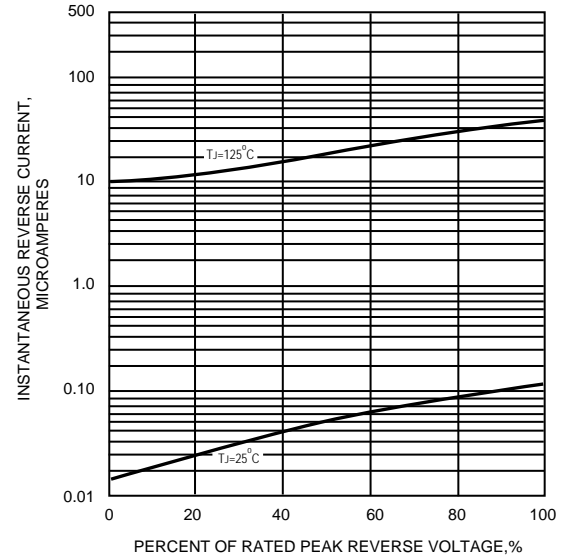**FIG.1 - FORWARD CURRENT DERATING CURVE**

**FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

**FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS**

**FIG.4 - TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT**

**FIG.5 - TYPICAL JUNCTION CAPACITANCE**
