



GF10A THRU GF10Y

SURFACE MOUNT GLASS PASSIVATED JUNCTION RECTIFIER

Reverse Voltage - 50 to 1600 Volts

Forward Current - 1.0 Ampere

PATENTED

SMA/DO-214AC



FEATURES

- * GPRC (Glass Passivated Rectifier Chip) inside
- * Glass passivated cavity-free junction
- * Ideal for surface mount automotive applications
- * Built-in strain relief
- * Easy pick and place
- * High temperature soldering guaranteed: 260°C/10 seconds, at terminals
- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0

MECHANICAL DATA

Case : JEDEC DO-214AC molded plastic over passivated chip

Terminals : Tin plated, solderable per MIL-STD-750, Method 2026

Polarity : Color band denotes cathode end

Weight : 0.002 ounces , 0.064 gram

*Dimensions in inches and (millimeters)

SUPEREX II™

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.	SYMBOLS	GF10									UNITS
		A	B	D	G	J	K	M	Q	Y	
Maximum repetitive peak reverse voltage	VRRM	50	100	200	400	600	800	1000	1200	1600	Volts
Maximum RMS voltage	VRMS	35	70	140	280	420	560	700	840	1120	Volts
Maximum DC blocking voltage	VDC	50	100	200	400	600	800	1000	1200	1600	Volts
Maximum average forward rectified current (SEE FIG.1)	I (AV)	1.0									Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	IFSM	30									Amps
Maximum instantaneous forward voltage at 1.0 A	VF	1.0							1.25		Volts
Maximum DC reverse current TA=25°C TA=125°C at rated DC blocking voltage TA=150°C	IR	5 30 50							5 50 -		uA
Typical junction capacitance (NOTE 1)	CJ	12									pF
Typical thermal resistance (NOTE 2)	R θJA	56									°C / W
	R θJL	14									
Operating junction and storage temperature range	TJ,TSTG	-65 to +175									°C

NOTES : (1) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts

(2) Thermal resistance from junction to ambient and from junction to lead P.C.B. mounted on 0.2 x 0.2" (5.0 x 5.0mm) copper pad areas

RATINGS AND CHARACTERISTIC CURVES GF10A THRU GF10Y

FIG.1 - FORWARD CURRENT DERATING CURVE

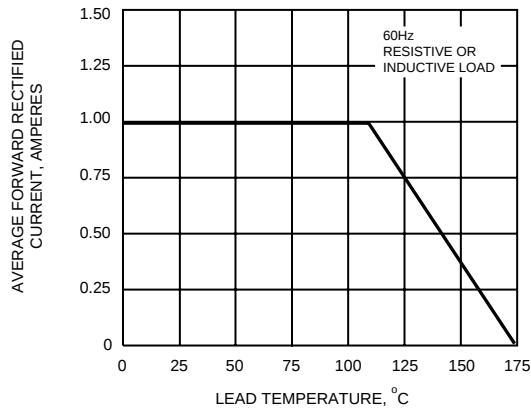


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

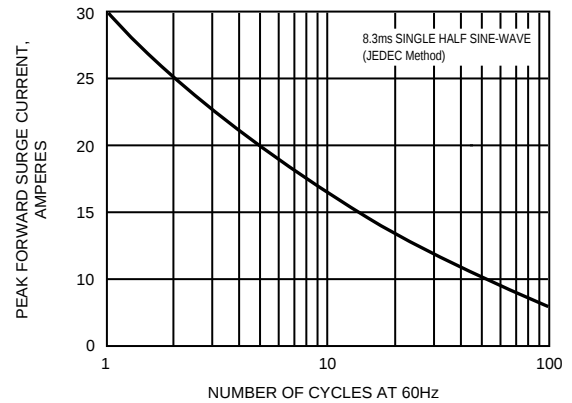


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

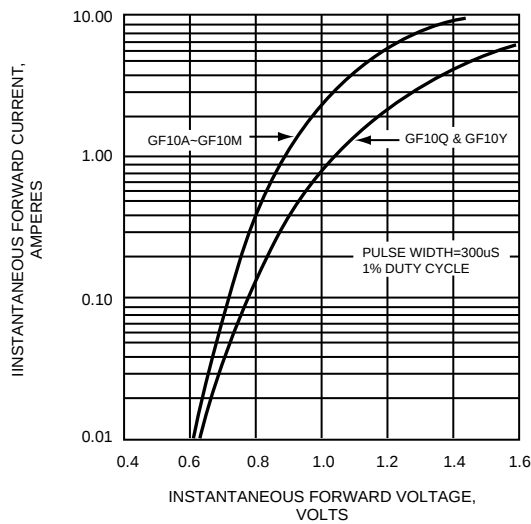


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

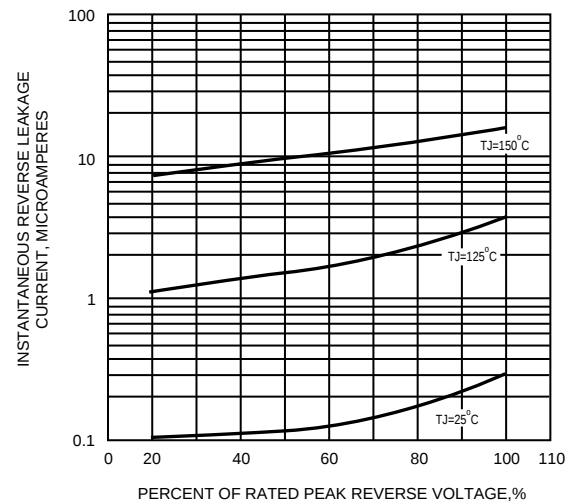


FIG.5 - TYPICAL JUNCTION CAPACITANCE

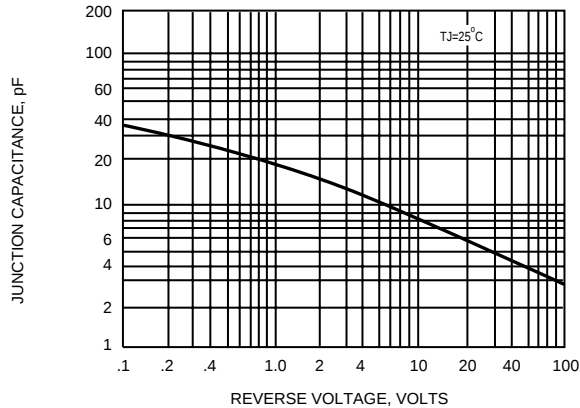


FIG.6 - TYPICAL TRANSIENT THERMAL IMPEDANCE

