



# KBJ6DH THRU KBJ6MH GLASS PASSIVATED BRIDGE RECTIFIER

Reverse Voltage - 200 to 1000 Volts

Forward Current - 6.0 Amperes



## FEATURES

- \* Halogen-free type
- \* Compliance to RoHS product
- \* Single-in-line package
- \* High current capacity with small package
- \* High Surge Current Capability
- \* Ideal for Printed Circuit Board Applications
- \* Plastic Material-UL Recognition Flammability Classification 94V-0

## MECHANICAL DATA


**Case :** KBJ molded plastic

**Terminals :** Tin Plated, solderable per

MIL-STD-750, Method 2026

**Polarity :** As marked on Body

**KBJ**

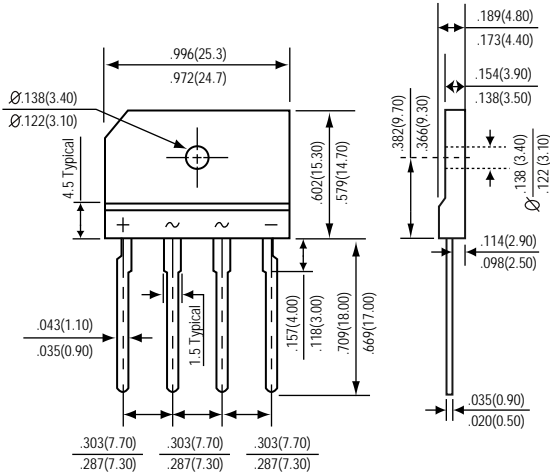

\*Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.	SYMBOLS	KBJ6DH	KBJ6GH	KBJ6JH	KBJ6KH	KBJ6MH	UNITS
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	200	400	600	800	1000	Volts
Maximum RMS voltage	V <sub>RMS</sub>	140	280	420	560	700	Volts
Maximum DC blocking voltage	V <sub>DC</sub>	200	400	600	800	1000	Volts
Maximum average rectified forward current (NOTE 1) T <sub>C</sub> =100 °C	I <sub>(AV)</sub>	6.0					Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	170					Amps
Maximum instantaneous forward voltage @ I <sub>F</sub> =3.0 A	V <sub>F</sub>	1.0					Volts
Maximum DC reverse current @ T <sub>C</sub> =25 °C at rated DC blocking voltage @ T <sub>C</sub> =125 °C	I <sub>R</sub>	5 500					uA
Typical junction capacitance per element (NOTE 2)	C <sub>J</sub>	55					pF
Typical thermal resistance (NOTE 1, 3)	R <sub>θJC</sub>	3.4					°C / W
Operating junction and storage temperature	T <sub>J</sub> , T <sub>STG</sub>	-55 to +150					°C

NOTES : (1) Unit case mounted on Al plate heat-sink  
 (2) Measured at 1.0 MHz and applied reverse voltage of 4.0 V DC.  
 (3) Thermal resistance per leg on P.C.B. without heat-sink.

# RATINGS AND CHARACTERISTIC CURVES KBJ6DH THRU KBJ6MH

FIG.1 - FORWARD CURRENT DERATING CURVE

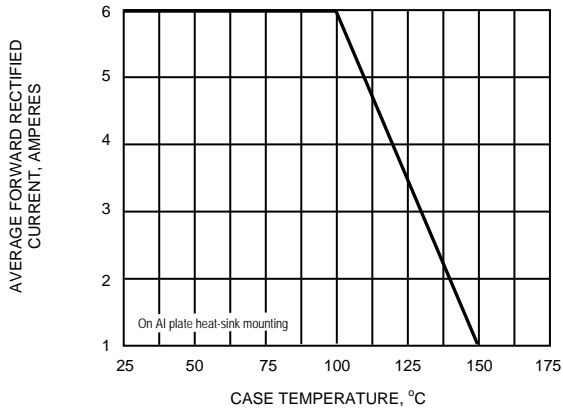


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

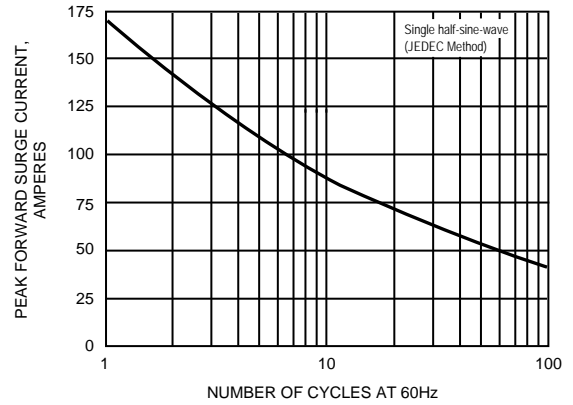


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

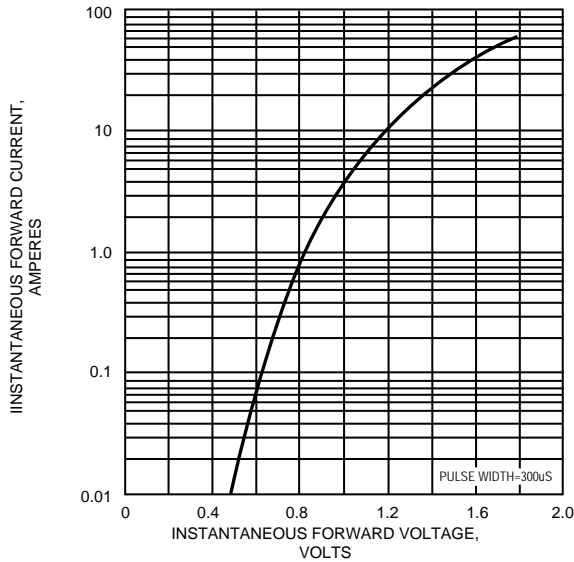


FIG.4 - TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

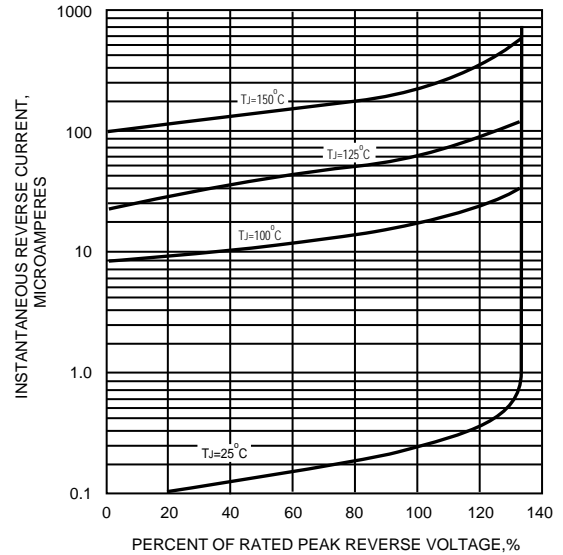


FIG.5 - TYPICAL JUNCTION CAPACITANCE

