



GBU1002 THRU GBU1010


GLASS PASSIVATED BRIDGE RECTIFIER

Reverse Voltage - 200 to 1000 Volts

Forward Current - 10 Amperes



GBU

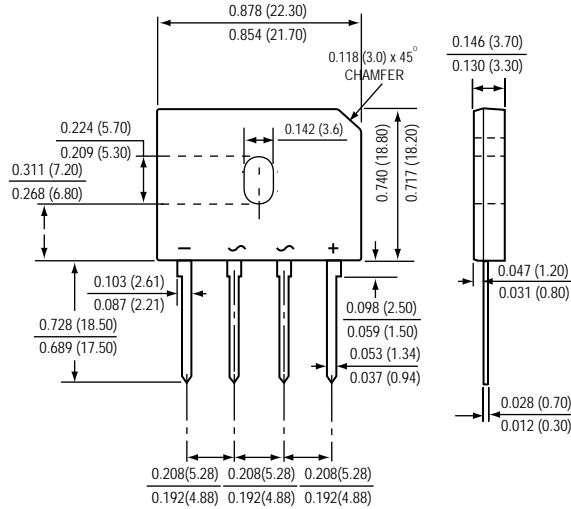

FEATURES

- * Glass passivated chip junctions
- * Compliance to RoHS product
- * Plastic Material has Underwriters Laboratory Flammability Classification 94V-0
- * High surge current capability
- * Ideal for Printed Circuit Boards
- * High temperature soldering guaranteed : 260°C/10 seconds

MECHANICAL DATA

Case : Molded Plastic
 Terminals : Tin Plated, solderable per MIL-STD-750, Method 2026
 Polarity : As marked on Body
 Weight : 4.0 grams (approx)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.	SYMBOLS	GBU1002	GBU1004	GBU1006	GBU1008	GBU1010	UNITS	
Maximum repetitive peak reverse voltage	VRRM	200	400	600	800	1000	Volts	
Maximum RMS voltage	VRMS	140	280	420	560	700	Volts	
Maximum DC blocking voltage	VDC	200	400	600	800	1000	Volts	
Maximum average forward rectified current Tc=100°C (NOTE 1,2)	I (AV)	10						Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	IFSM	220						Amps
Maximum instantaneous forward voltage at 5.0 A	VF	1.10						Volts
Maximum DC reverse current @TA=25°C at rated DC blocking voltage @TA=125°C	IR	5 500						uA
Typical Junction Capacitance per element (NOTE 4)	CJ	95						pF
Typical thermal resistance per leg (NOTE 3)	RθJA RθJC	22 3.4						°C / W
Operating junctionStorage temperature range	TJ,TSTG	-55 to +150						°C

NOTES : (1) Unit case mounted on Al plate heat-sink
 (2) Unit mounted on P.C.B. without heat-sink
 (3) Recommended mounting position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with #6 screw heat-sink size : 6.35 x 3.5 x 0.15cm)
 (4) Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

RATINGS AND CHARACTERISTIC CURVES GBU1002 THRU GBU1010

FIG.1 - FORWARD CURRENT DERATING CURVE

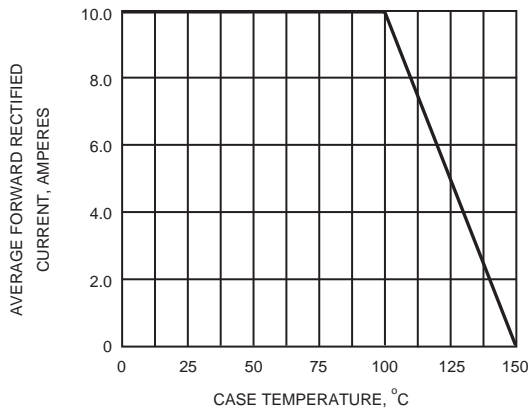


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

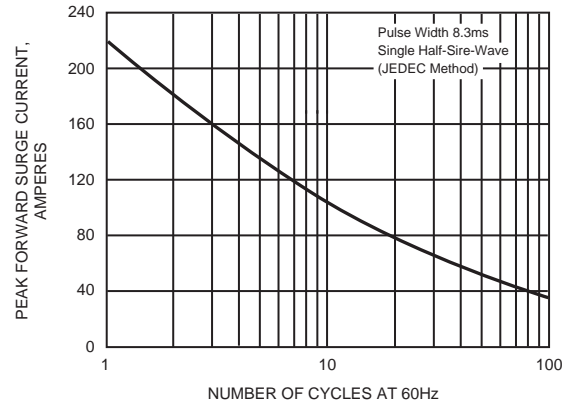


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

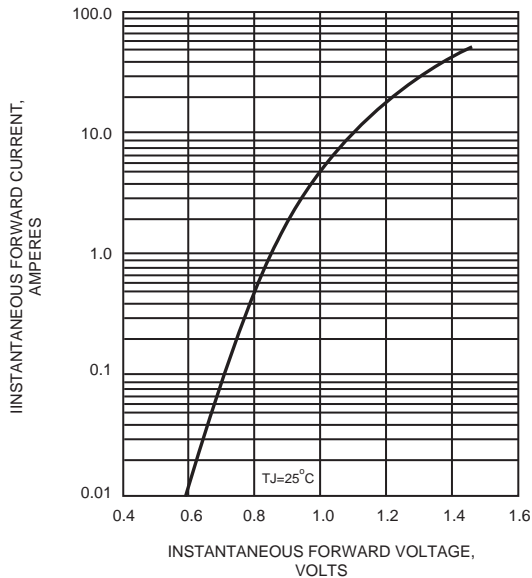


FIG.4 - TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

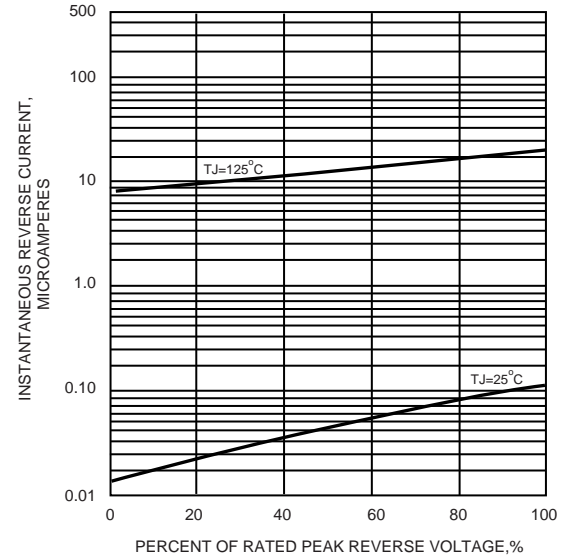


FIG.5 - TYPICAL JUNCTION CAPACITANCE

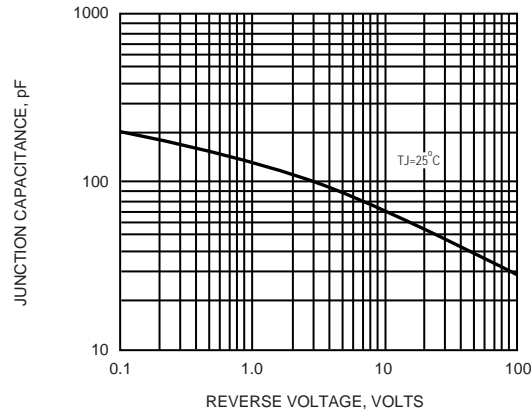


FIG.6 - TYPICAL TRANSIENT THERMAL IMPEDANCE

